




StillNote™ Panel

Product Data

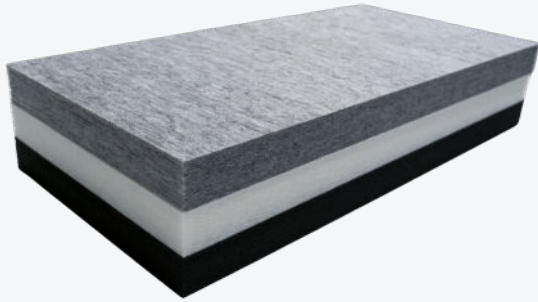


StillNote™ is iKoustic's absorption product specially designed to control and attenuate noise within a space. The product is 40mm thick polyester fiber board with a high content of recycled material (>60%). The high acoustic absorption offered will improve the comfort and intelligibility of speech within the space whilst also providing an appealing aesthetic.

| | | | |
|-------------------|--|------------------------------|--|
| Type | Absorption panel | Sheet Weight | 0.9kg, 1.8kg, 3.6kg respectively |
| Materials | PET (polyester fibers) | Finish Colour | White, grey or black. |
| Dimensions | 600mm x 600mm 600mm x 1200mm 1200mm x 1200mm | Applications/ Use | StillNote™ is ideal for offices, gyms, home studios, music studios, and restaurants. |

Features & Benefits

- Easy to install
- Class A absorption material
- Material is >60% recycled
- Suitable for a variety of applications
- 100% recyclable
- Lightweight
- Minimalistic finish
- Range of sizes available



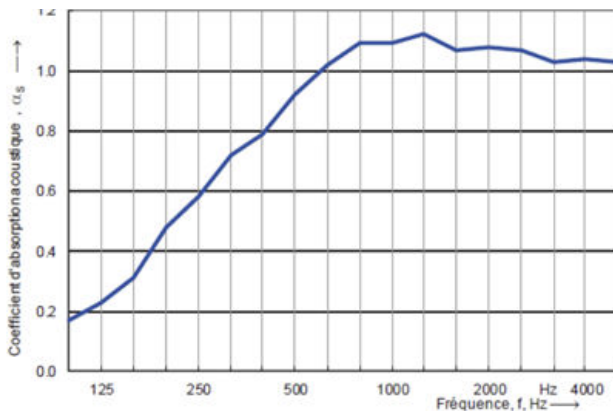

Performance Characteristics

Nominal Thickness
40±3mm

Density
50 Kg/m³ (IN ISO 845)

Thermal Performance
0.034 W/mK (IN 126674)

Absorption Rating
Class A | coefficient of 0.9

Fire Classification
B-s2,d0 (ISO 13501-1:2002)

Installation Instructions

Cutting

Polyester wool can be cut with a sharp ceramic knife, scissors, filament, band saw, or foam saw.

Fixing

iKoustic recommends that the panels are installed using contact spray adhesive. The panels can also be installed using mechanical fixings.

Maintenance

The surface can be easily cleaned with a vacuum cleaner and a soft brush.

Environmental Characteristics

The StillNote™ range is manufactured without VOC or formaldehyde emissions: product classified A+ (ISO 16000) according to report no. 72153D and Öko-Tex 100 environmental label class 1 (ISO 17050-1) – report no. 1596. Recyclable product (100% PET)

Packing & Storage

Packaging
Comes in boxes of 125mm thick

Pack Size
The boxes can contain up to four 1200x600mm panels and eight 600x600mm panels.

Shelf Life

The ambient temperature during installation must be between 15 and 30°C. Products must be stored in enclosed and dry places, not subject to strong variations in humidity.

Storage and Transport Conditions

StillNote™ panels must be stored indoors, protected from the elements. No other product or object should be stored on top, the cartons are stackable between the